

QAC 1100 TWINPOWER SD

This document gives a complete list of technical data with some detailed explanations of the main systems, subsystems and performance of our generators, in order to support local sales documentation, tenders or even technical doubts.

While every effort has been made to ensure that the information in this manual is correct Atlas Copco does not assume responsibility for possible errors. Atlas Copco reserves the right to make changes without prior notice.



Standard Model Scope

The QAC is our twenty-foot containerized unit which provides superior power, is super silent and ideal for heavy duty applications. Its complete configuration makes it our High spec product.

The innovative dual compartment design whereby the power compartment and the cooling compartment are completely separate, ensures maximum efficiency and safe operation in the most extreme conditions. In the power compartment, which houses the alternator and the engine.

Serviceability is one of our main concerns. Doors can be easily opened so that all components are always within reach, ensuring maintenance a service. Engine has full step-in access, alternator and air filters share same door access to avoid wasting time and sliding base concept also enables parts to be accessed by simply sliding out the appropriate section

AGI + 2x Standard Qc4003 controller with paralleling system, makes possible to work with the mains and with other units (till 16) in applications as Independent Power Plants (IPP) all over the world. Providing Atlas Copco Power Management System (PMS), which is a smart management of the load of our customers, saving costs in terms of fuel, maintenance and performance.

Features

- Carefully selected components, accurately developed and tested configuration
- Superior standard configuration and extensive option list
- 500 hours service interval and superior accessibility to all service points
- Compact and safe concept and sturdy design
- Designed and built to last

Benefits

- Accurate and stable power regardless of the conditions
- Ability to power a wide range of applications
- Service efficiency: increased up-time
- Increased transport efficiency, separated control and power cubicle
- Superior resale value / longer life time

Manufacturing and Environmental Standards

The QAC range is manufactured following stringent ISO 9001 regulations, and by a fully implemented Environmental Management System fulfilling ISO 14001 requirements + OHSAS 18000.

Attention has been given to ensure minimum negative impact to the environment. The QAC range complies with the latest noise emission directives.

ISO 8528: QAC generators are designed to comply with ISO 8528 regulation.





QAC 1100 TWINPOWER SD

1. Performance Data

Generator			QAC1100 TW (50Hz)	QAC1100 TW (60Hz)
Rated speed	rpm		1500	1800
Rated power factor (lagging)			0.80	0.80
Rated Prime Power, PRP	kVA		1000.00	1000.00
	kW		800.00	800.00
Limited Time Power, ESP (Stand-by)	kVA	220V & 440V / (400V – 50Hz)	1062.00	1100.00
		380V	-	1060.00
	kW	220V & 440V / (400V – 50Hz)	849.60	880.00
		380V	-	848.00
Continuous Operation Power, COP (Continuous)	kVA	220V & 440V / (400V – 50Hz)	800	800
		380V	-	800
	kW	220V & 440V / (400V – 50Hz)	640	640
		380V	-	640
Rated voltage (3ph. line to line)	V		400	220 & 440 / 380
Rated voltage (1ph. line to neutral)	V		231	127 & 254 / 219
Rated current (STBy) - (440V) / (400V – 50Hz)	A		1532,9	1443,3
Rated current (STBy) - (380V)	A		-	1610,5
Rated current (STBy) - (220V)	A		-	2886,8
Maximum sound power level (LWA) complies with 2000/14/EC	dB(A)		103	103
Maximum sound pressure level (LPA) at 7 m	dB(A)		73	73
Coupling engine/alternator			Direct	
Fuel Autonomy at full load	h		7,8	8
Single step load capability (Acc ISO 8528)	%		55	70
Frequency drop (lower than % isochronous)	%		<10	
Maxim oil consumption 100% load	l/h		0,606	0,592

Derating Table (%)

QAC1100 - 60Hz

Derating Factor %			temperature (°C)										
height (m)	0	0	5	10	15	20	25	30	35	40	45	50	
	0	100	100	100	100	100	100	100	100	95	95	95	
	500	100	100	100	100	100	100	100	100	95	95	95	
	1000	100	100	100	100	100	100	100	100	95	95	90	
	1500	100	100	100	100	100	100	100	100	95	90	85	
	2000	95	95	95	95	95	95	95	95	90	85	80	
	2500	90	90	90	90	90	90	90	90	85	80	80	
	3000	85	85	85	85	85	85	85	80	80	80	75	
	3500	75	75	75	75	75	75	75	75	75	75	70	
	4000	70	70	70	70	70	70	65	65	65	65	65	
	4500	60	60	60	60	60	60	60	60	60	60	60	
	5000	55	55	55	55	55	55	55	55	55	55	55	

QAC1100 - 50Hz

Derating Factor %			temperature (°C)										
height (m)	0	0	5	10	15	20	25	30	35	40	45	50	
	0	100	100	100	100	100	100	100	100	95	95	90	
	500	100	100	100	100	100	100	100	100	95	95	90	
	1000	100	100	100	100	100	100	95	95	95	90	85	
	1500	100	100	100	100	100	100	95	95	95	90	85	
	2000	95	95	95	95	90	90	90	90	90	85	80	
	2500	90	90	90	90	90	90	90	90	85	80	80	
	3000	85	85	85	85	85	85	85	80	80	80	75	
	3500	75	75	75	75	75	75	75	75	75	75	70	
	4000	70	70	70	70	70	65	65	65	65	65	65	
	4500	60	60	60	60	60	60	60	60	60	60	60	
	5000	55	55	55	55	55	55	55	55	55	55	55	



QAC 1100 TWINPOWER SD

Limitations*

		QAC 1100 Sd
Maximum ambient temperature	°C	50
Altitude capability*	m	5000
Relative air humidity maximum	%	85
Minimum starting temperature	°C	-10
Minimum starting temperature, with coldstart equipment	°C	-25

Application Data



Mode of operation	ESP/PRP/COP
Max. Inclination	12°
Operation	Single / Synchronism
Start-up and control mode	Manual / Auto / PMS / Test
Climatic exposure	open air

*See deranting matrix

QAC 1100 Sd

Fuel Consumption at*:		50Hz	60Hz
0% Load	kg/h	17,3	20,9
50% Load	kg/h	86,7	87,9
75% Load	kg/h	126	125
100% Load	kg/h	178,8	174,8
110% Load	kg/h	190,7	191,6
Specific Fuel Consumption at:			
100% Load	kg/kWh	0,224	0,218
110% Load	kg/kWh	-	-

*Diesel fuel type No. 2 diesel or a fuel corresponding to ASTM D2. Density: 0,86kg/l.

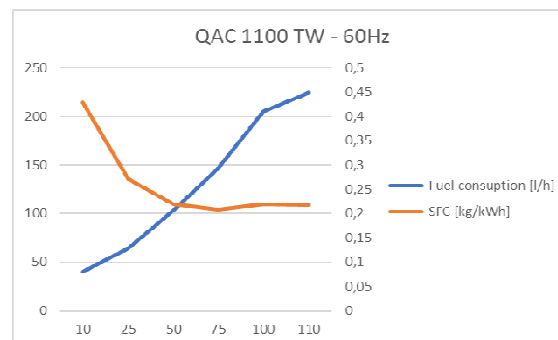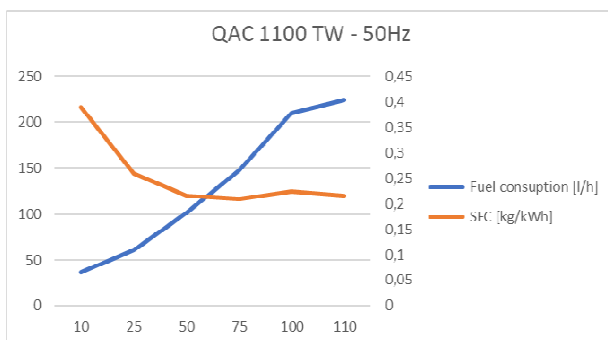


(Data estimated in according to test)

(Reference conditions at 25°C Air Inlet Temperature, 60% Relative Humidity, 1bar Absolute inlet pressure, for different conditions or limitations contact Atlas Copco technical support).



2. Box

QAC 1100 Sd			
	rpm	1500	1800
Dimensions (L x W x H)	m	6,056 x 2,438 x 2,591	
Weight			
Net mass	Kg	10410	
Wet mass	Kg	11964	
Capacity of spillage free frame	l	1988,8	
Colour specification			
Grey	RAL	7015 / 7011	
Yellow		01 YELLOW A	

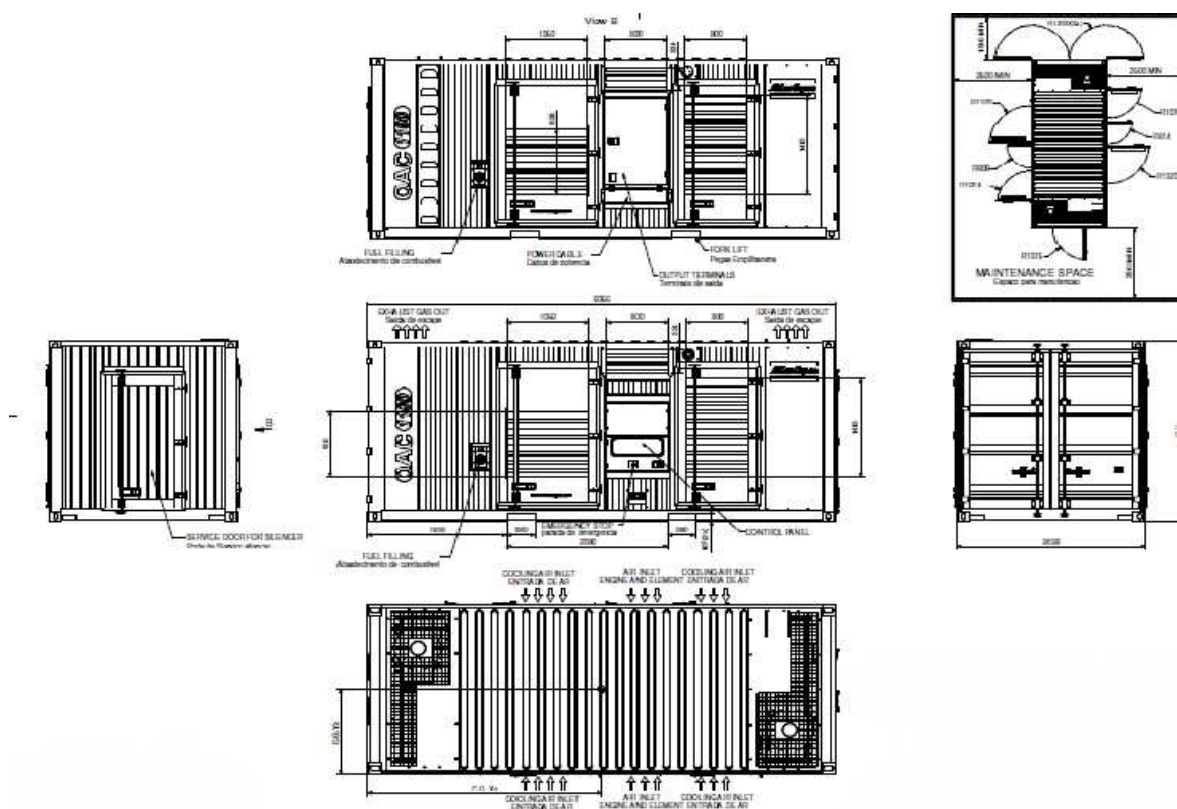



QAC 1100 TWINPOWER SD

3. Engine

General			
Speed	rpm	1500	1800
Manufacturer		Scania	
Model		DC13 072A ref.02-14	
Standard		ISO 8528-2	
Rated net output	kW	428	428
Number of cylinders	u.	6	
Configuration		6 in Line	
Aspiration		Turbocharged	
Speed governor		eletronic	
Bore	mm	130	
Stroke	mm	154	
Electrical system (DC)	V	24	
Compression ratio		16,7:1	
Displacement (swept volume)	l	12,7	
Piston speed	m/s	7.7	9.24
Combustion system		Direct injection	
Charged air cooling system		Intercooled	
Maximum permissible load factor of PRP during 24h	%	70	
Capacity of oil sump	l	39	
Oil pressure at rated speed	kPa	3 - 6 Bar	
Maximum Lubrication oil temperature	°C	110°	
Oil Filter(Standard)		Atlas Copco	
Oil Filter(By-pass)		Atlas Copco	
Air intake system			
Air consumption 60°C (PRP)	m³/min	394,49	394,49
Air consumption 59°C (LTP)	m³/min	533,72	438,12
Air Filters		Atlas Copco	
Air filter cleaning efficiency	%	99.9	
Air filter capacity	m³/min	18 - 25	
Cooling system			
Coolant		ParCool / Water 50/50	
Capacity of coolant (engine)	l	45	
Fan material		Plastic	
Fan power consumption at nominal speed	kW	12	



QAC 1100 TWINPOWER SD

Fuel system		QAC 1100 Sd	
	rpm	1500	1800
Capacity fuel tank	l	1640	
Fuel tank specifications		Plastic	
Fuel filter			
Micron rate	micron	10	
Fuel pre-filter		Water Separator	
Design Pressure	bar	1.2	
Test pressure		1.8	
Temperature	°C	-25°C to 120°C	
Volume	l	10	
Emission compliance		NA	NA
NOx	g/kWh	14.085	13.935
CO	g/kWh	0.27	0.914
HC	g/kWh	0.062	0.068
PM	g/kWh	0.035	0.036
SO ₂	g/kWh	-	-
CO ₂ (at 100% load)	Kg/h	-	-

4. Alternator

		QAC 1100 Sd	
General	rpm	1500	1800
Manufacturer		WEG	
Model		AG10-280MI40AI	
Standard		IEC 34-1 / ISO 8528-3	
Rated net power	kVA	548	600
Number of bearings		1	
Number of wires		12	
Voltage regulator accuracy		+/- 0.5%	
Degree of protection		IP23	
Insulation class		H	
Environment Protection/ Industrial- grade 1		IEC 60721-3-3/ =<95% of humidit	
		Possible condensation	
		ONSHORE	
Number of poles	440V / 400V	4	
	380V	4	
	220V	4	
Number phases		3	
Over speed	rpm	2250	
Total Harmonic Distortion THD		< 5%	
Xd Direct axis synchro reactance unsaturated	%	150	199
X'd Direct axis transient reactance saturated	%	11,6	13,8
X''d Direct axis subtransient reactance saturated	%	8,4	10



QAC 1100 TWINPOWER SD

Excitation system		Brushless with auxiliary coil			
	A	Trifásico	Monofásico	Trifásico	Monofásico
Sustained short-circuit current		1804	2406	2183	2911
Frame dimensions (single bearing)					
Lenght	mm	1144			
Width	mm	645			
Height	mm	840			
Weight	kg	1153			
AVR					
Model		GRT7-TH4E			
Sensing		3 phase			
Voltage regulation	%	±0.5			
		50Hz		60Hz	
Nominal excitation current		Trifásico	Monofásico	Trifásico	Monofásico
	A	2,9	3	2	2,3
Voltage detection	V	≤530			

The WEG alternators are designed for heavy duty continuous applications:

- INDUSTRIAL - GRADE 1 protection (relative humidity >95%) for tropical environment (except coastal areas). Salinity salt concentration ≤ 1 g/m³. Degree of protection: IP21 or IP23. Plate packages: unpainted, with painting plan: 207. Clamping elements: ZTAM. Impregnation: VPI;
- ONSHORE;
- OFFSHORE applications are optional;
- 4 pole brushless design with single bearing, Class H insulation and IP23 rating;
- Voltage regulation +/- 0.5%;
- AREP is a standard feature. PMG is optional;

5. Generator

QAC 1100 Sd					
	rpm	1500		1800	
Energy Balance					
Engine		PRP	ESP	PRP	ESP
Heat rejection to exhaust	kW	309	344	320	358
Heat rejection radiation from engine	kW	567	645	594	672
Heat rejection to coolant	kW	134	158	142	166
Alternator (PF 0,8)					
Efficiency at full load	%	88,90%			

Exhaust System		
Flow (PRP)	kg/min	34
Flow (LTP)	kg/min	36
Exhaust gas temperature "after turbine" (PRP)	°C	536
Exhaust gas temperature "after turbine" (LTP)	°C	557
Max. Backpressure	kPa	40
Output pipe diameter	mm	203





QAC 1100 TWINPOWER SD

Battery			
Quantity		4	4
Voltage	V		12
Capacity	Ah		100
Connection			2x Serie
Dimensions (L x W x H)	mm		330 x 172 x 244
Starting power	kW		5,5
Weight (wet)	kg		24,88
Sensor*			
Oil (temp, pressure & level)			STD
Coolant (temp & level)			STD
Fuel (feed pressure)			STD
Charge air (temp & pressure)			STD
Fuel Level			STD
Generator Voltage	V		220/380/440 / (400 – 50Hz)
Mains Voltage Qc4003 + AGI			STD
Generator Current transformer Qc4003			STD
TM changeover feedback (Qc4003)			STD
Reply: Mains CB opened/closed (Qc4003)			STD
Reply: Generator CB opened/closed (Qc4003)			STD
Air Inlet Pressure Switch			STD
Low Coolant Level Shutdown/Warning			STD

*Confirm with Atlas Copco technical support.

6. Power Output

Circuit Breaker

Speed		1500	1800
Model		SCHNEIDER NS1600N	
Poles		3	
Rated current (In) (A)	440V / 400V	1532,9	1443,4
	380V	-	1610,5
	220V	-	2886,8
Thermal release, regulated (It)	A	0.8~1.0 In	
CB tripping point (A)	440V / 400V	919,74	866,04
	380V	-	966,30
	220V	-	1732,08
Overload protection (Ir)	A	2.5~5.0 In	
Fault current protection, residual current release (Idn)	A	0,03-30	
Motor Driven DC voltage	V	24	
Motorized		Yes	
Life operating cycles without maintenance		10000	



QAC 1100 TWINPOWER SD

Status of neutral		
TN-S (earthed)		STD
IT		OP
IT (EDF)		OP
Terminal Board		
Bolts diameter	mm	12

STD – Standard; OP – Option; NA – Not Available

7. Options

Mechanical Options

Special Equipment		
Spark arrestor		OP
Material		Various
Inlet shutdown valve		OP
Max/Min Temperature Valve	°C	93° (Max)

Spark arrestor is a device that is designed to trap any exhaust particles or combustible materials, such as sparks or other flaming debris, from escaping into hazardous areas where they might cause fires. Exhaust particles are centrifuged in the spark arrestor, then collected and stored in a reservoir until emptied by an operator. An inlet shutdown valve serves to stop the engine by closing the air intake once the controller detects an over speed in the engine.

Fuel System		
External fuel tank connection		STD
Material		Brass
Test pressure	bar	1
Overpressure	bar	2
Open pressure	bar	1±0,1
Max/Min Temperature	°C	-30 to +80

The EFT enables the generator to run for long periods of time on an external fuel supply without having to refuel. We can also provide quick couplings to enable easy and fast connection to the fuel tank

Electrical Options

Coolant Heater		
Electric driven coolant heater		STD
Voltage	V	220
Power	kW	1
Current	A	8,3
Thermostat Range	°C	NA
Fuel driven coolant heater		OP
Electrical power	W	NA
Rated voltage	V	NA
Operating pressure	bar	NA
Flow rate at 0,1 bar	l/h	NA

Its main mission is heat the coolant so that the temperature of the engine is always high enough to start straight away, even in temperatures as low as minus 25 degrees Celsius. Not for all models but a fuel powered version is available, which is ideal for remote areas without mains supply.

Dual		
Dual frequency switch 50Hz-60Hz		YES
Battery		
Battery charger		STD
Temperature	°C	-18 to 50



QAC 1100 TWINPOWER SD

Input frequency	Hz	48.....64
Output voltage	V	24 - 27,5
Output current	A	5
Output power	W	137
Dimensions (L x W x H)	mm	140 x 140 x 63
Battery cut off switch		STD

Battery charger is necessary for stand-by applications because the controller is always on, ready to start at any time. Battery cut off switch allows the battery to be disconnected when storing the unit, thus preventing the battery from becoming drained.

Electrical Options

Electronic speed regulator		QAC 1450 Sd
Controllers		STD
Qc1103		NA
Qc2103		NA
Qc4003 + AGI		STD

*with Qc4003+ PMS Atlas Copco recommends: Battery charger + Coolant heater

*Just 1 ph socket available

*Qc4003 includes always communication cables and needed adaptors


Qc1103: is the controller dedicated for island operation or remote start

Qc2103: has in addition the possibility of detecting a mains failure

Qc4003: is the high spec controller prepared to work synchronized with several units (IPP) and/or the mains

AGI: is an easy customer touch screen interface which select QAC1100 Twin Power operational mode in 2 clicks

CONTROLLERS KEY FEATURES QC 4003 CONTROLLER

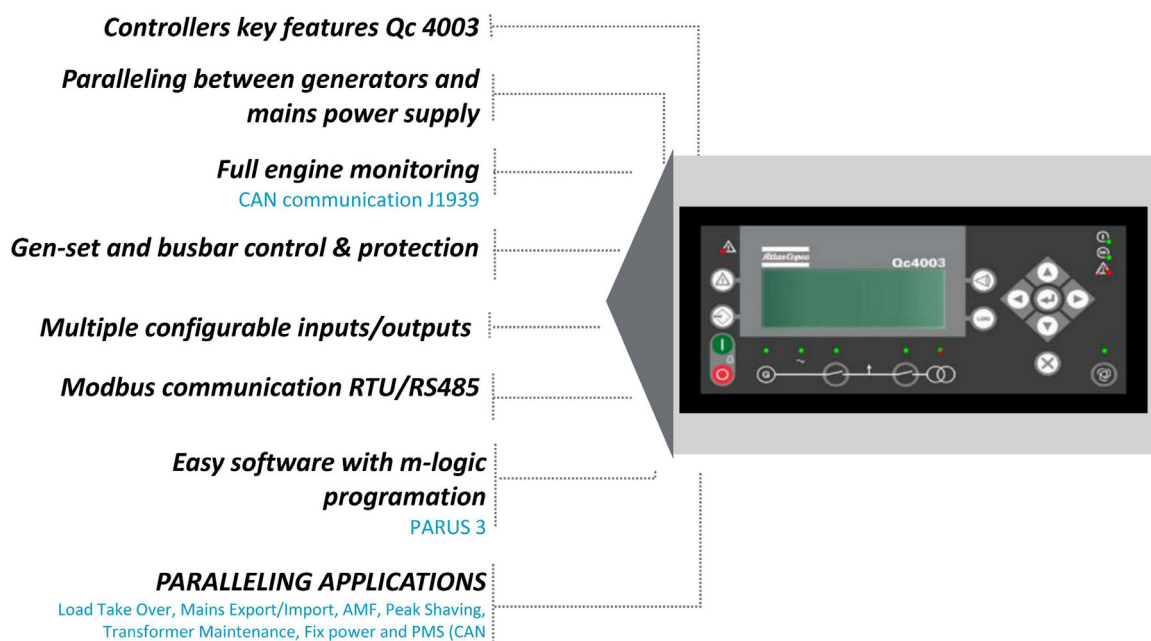

QAC 1100 TWINPOWER SD

CONTROLLERS KEY FEATURES AGI

